




# RONG YUNN





**RYO-8**  
TERMINAL CRIMPING TOOL

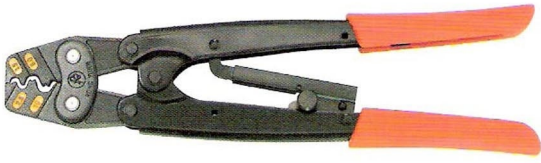

Non insulated terminal range: 1.25, 2, 3.5, 5.5, 8 mm<sup>2</sup>  
Copper tube terminal range: 1.5, 2.5, 4, 6, 10 mm<sup>2</sup>  
Length: 270 mm                      Weight: 0.48 kgs

**RYO-14**  
TERMINAL CRIMPING TOOL




Non insulated terminal range: 1.25, 2, 3.5, 5.5, 8, 14 mm<sup>2</sup>  
Copper tube terminal range: 1.5, 2.5, 4, 6, 10, 16 mm<sup>2</sup>  
Length: 298 mm                      Weight: 0.52 kgs

**RYO-25**  
TERMINAL CRIMPING TOOL



Non insulated terminal range: 5.5, 8, 14, 22 mm<sup>2</sup>  
Copper tube terminal range: 6, 10, 16, 25, 35 mm<sup>2</sup>  
Length: 354 mm                      Weight: 0.78 kgs

**RYO-38**  
TERMINAL CRIMPING TOOL

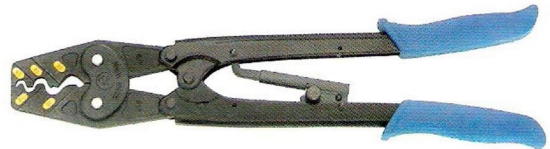

Non insulated terminal range: 5.5, 8, 14, 22, 38 mm<sup>2</sup>  
Copper tube terminal range: 6, 10, 16, 25, 35, 50 mm<sup>2</sup>  
Length: 375 mm                      Weight: 0.88 kgs

**RYO-120**  
TERMINAL CRIMPING TOOL



Heavy duty crimping tool for copper tube terminal from 10 to 120 mm<sup>2</sup> with non-ratchet screw adjustment.  
Non insulated terminal range: 8, 14, 22, 38, 60, 70, 80, 100 mm<sup>2</sup>  
Copper tube terminal range: 10, 16, 25, 35, 50, 70, 95, 120 mm<sup>2</sup>  
Length: 573 mm                      Weight: 2.78 kgs

**RYO-150**  
TERMINAL CRIMPING TOOL



Heavy duty crimping tool for copper tube terminal from 10 to 150 mm<sup>2</sup> with non-ratchet screw adjustment.  
Non insulated terminal range: 8, 14, 22, 38, 60, 70, 80, 100, 125, 150 mm<sup>2</sup>  
Copper tube terminal range: 10, 16, 25, 35, 50, 70, 95, 120, 150 mm<sup>2</sup>  
Length: 670 mm                      Weight: 3.9 kgs



**RCE-056**

**CORD END TERMINAL CRIMPING TOOL**



Cord end terminal range: 0.5-0.75 mm<sup>2</sup> (22-20 AWG),  
1 mm<sup>2</sup> (18 AWG), 1.5 mm<sup>2</sup> (16 AWG), 2.5 mm<sup>2</sup> (14 AWG),  
4 mm<sup>2</sup> (12 AWG), 6 mm<sup>2</sup> (10 AWG).  
Length: 225 mm      Weight: 0.55 kgs

**RCE-416**


**CORD END TERMINAL CRIMPING TOOL**



Cord end terminal range: 4mm<sup>2</sup> (12 AWG), 6mm<sup>2</sup> (10 AWG),  
10mm<sup>2</sup> (8 AWG), 16mm<sup>2</sup> (6 AWG)  
Length: 225 mm      Weight: 0.55 kgs

**RYO-10**

**NON-INSULATED TERMINAL CRIMPING TOOL**

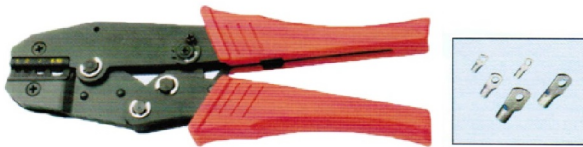

Non-insulated terminal range: 1.25, 2, 3.5, 5.5, 8mm<sup>2</sup>  
Copper tube terminal range: 1.5, 2.5, 4, 6, 10mm<sup>2</sup>  
Length: 225 mm      Weight: 0.55kg

**RYO-056**

**INSULATED TERMINAL CRIMPING TOOL**



Insulated terminal range: 0.5-1 mm<sup>2</sup> (22-18 AWG),  
1.5-2.5 mm<sup>2</sup> (16-14 AWG), 4-6 mm<sup>2</sup> (12-10 AWG).  
Length: 225 mm      Weight: 0.55 kgs

**RYO-B056**

**OPEN BARREL TERMINAL CRIMPING TOOL**



Open barrel terminal range: 0.5-1 mm<sup>2</sup> (22-18 AWG),  
1.5-2.5 mm<sup>2</sup> (16-14 AWG), 4-6 mm<sup>2</sup> (12-10 AWG).  
Length: 225 mm      Weight: 0.55 kgs

**RYO-05H**

**COAX CRIMPING TOOL**



8.1 mm	6.5 mm	5.4 mm		2.6 mm	1.72 mm
55, 58, 59, 62, 5, 6, 21, 140, 141, 142, 143, 210, 212, 222, 223, 303, 304, 400, BELDEN 8279, 8281, 9231, 9141					

Length: 236 mm      Weight: 0.56 kgs




**RYC-100**  
CABLE CUTTER




For cutting copper and aluminum cable up to 100 mm<sup>2</sup>  
Length: 315 mm      Weight: 0.7 kgs

**RYC-150**  
CABLE CUTTER

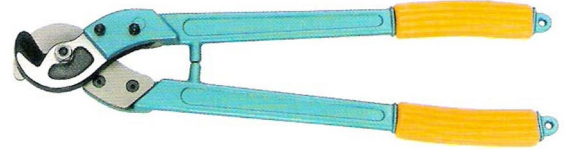


For cutting copper and aluminum cable up to 150 mm<sup>2</sup>  
Length: 420 mm      Weight: 0.9 kgs

**RYC-250**  
CABLE CUTTER

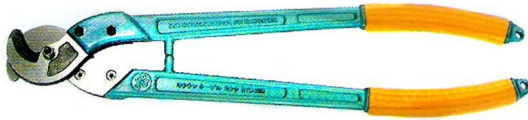


For cutting copper and aluminum cable up to 250 mm<sup>2</sup>  
Length: 600 mm      Weight: 1.7 kgs

**RYC-400**  
CABLE CUTTER

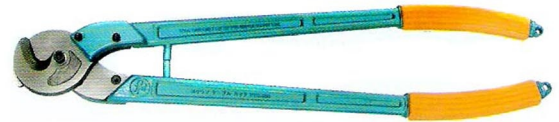


For cutting copper and aluminum cable up to 400 mm<sup>2</sup>  
Length: 700 mm      Weight: 2.1 kgs

**RYC-500**  
CABLE CUTTER

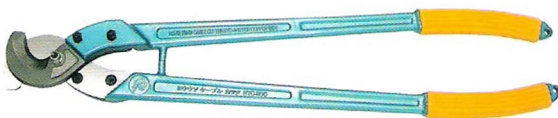

For cutting copper and aluminum cable up to 500 mm<sup>2</sup>  
Length: 800 mm      Weight: 2.9 kgs

**SCC-100**  
STEEL WIRE ROPE CUTTER

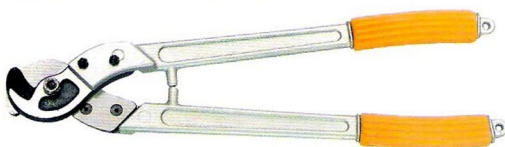

For cutting steel wire rope up to 10 mm.  
Mild steel rod up to 7 mm.  
Copper and aluminum cable up to 100 mm<sup>2</sup>  
Length: 420 mm      Weight: 0.9 kgs

**SCC-200**  
STEEL WIRE ROPE CUTTER



For cutting steel wire rope up to 14 mm.  
Mild steel rod up to 9 mm.  
Copper and aluminum cable up to 150 mm<sup>2</sup>  
Length: 600 mm      Weight: 1.7 kgs